

Technical data:

Dimensions:

Height: 670 mm

Depth: 42 mm

Max. Element width: 2,763 mm

Material thickness: 2 mm

Material: ALU

Surface: nature (raw) Optional: powder coating

Versions:

- Perforated plate Rg 10-20,78


- Plain-metal

Weight per meter of perforated plate: approx. 3,71 kg


Weight per meter of Plain-metal: approx. 4,28 kg

Glare protection supernatant approx. 0-13 mm


Butt joint approx. 5 mm

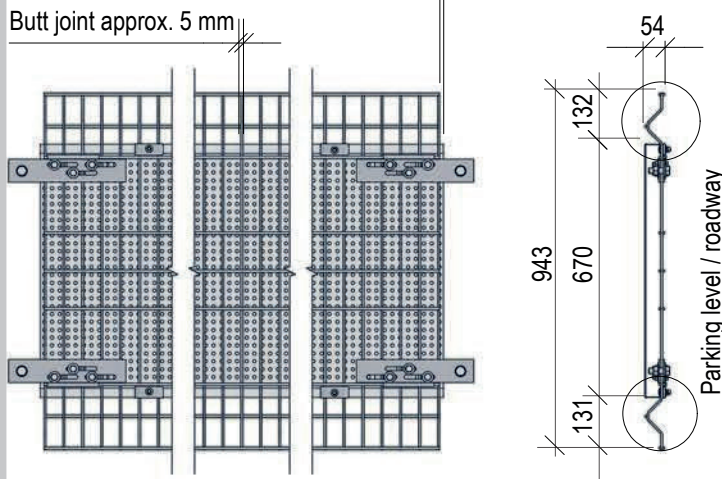

A (1:5)



B (1:5)



Scope of supply Mounting set glare protection per connection point consisting of:

- 1x strap glare protection - tzn
- 1x round-head screw ISO 8677 - M8x25 - A2
- 1x cap nut DIN 1587 - M8 - A2
- 1x washer ISO 7093 - Ø8,4 - A2

