



C (1 : 20)
View from the outside

support profile supplied
by the customer e.g. HEA

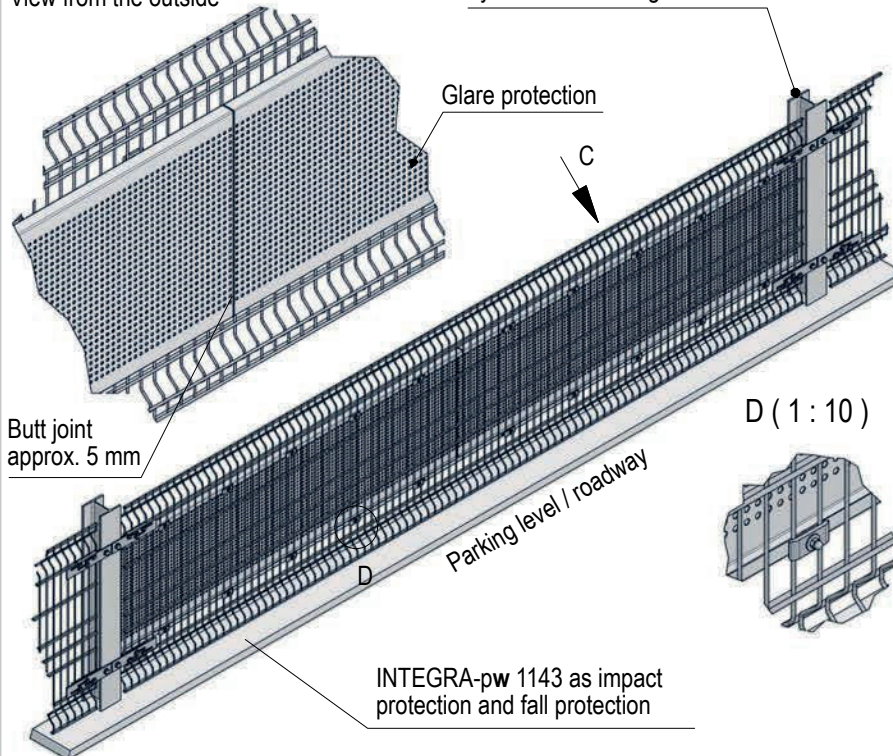

D (1 : 10)



Technical data:



Dimensions:
 Height: 670 mm
 Depth: 42 mm
 Max. Element width: 2,763 mm
 Material thickness: 2 mm
 Material: ALU
 Surface: nature (raw) Optional: powder coating

Versions:

- Perforated plate Rg 10-20,78
 - Plain-metal
- Weight per meter of perforated plate:
approx. 3,71 kg
 Weight per meter of Plain-metal:
approx. 4,28 kg

Glare protection supernatant approx. 0-13 mm


Butt joint approx. 5 mm

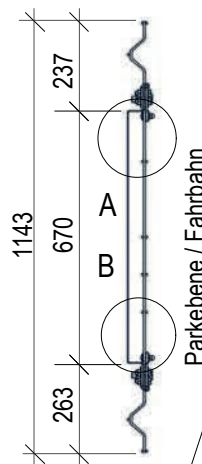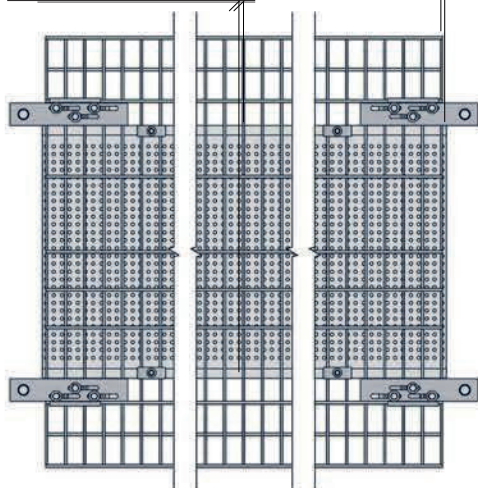

A (1 : 5)



B (1 : 5)



Scope of supply Mounting set glare protection per connection point consisting of:

- 1x strap glare protection - tzn
- 1x round-head screw ISO 8677 - M8x25 - A2
- 1x cap nut DIN 1587 - M8 - A2
- 1x washer ISO 7093 - Ø8,4 - A2

